


High Frequency Online Rack Mount UPS

PT - RT1-10KVA




Key Features


- LCD Display
- Active Input Power Factor Correction(PFC)
- Under full load, the input power factor can reach over 0.95.
- Adaptive Load Management
- It adopts standard frame structure design.
- Sine wave output. It provides the best power source guarantee for the load equipments for users.
- Zero delay: when the utility power is cut off or recover, there is absolutely no time between the transfer of AC mode and battery mode.
- Input null line and fire detecting function
- It has voltage breakthrough protection and strong anti- interference function.

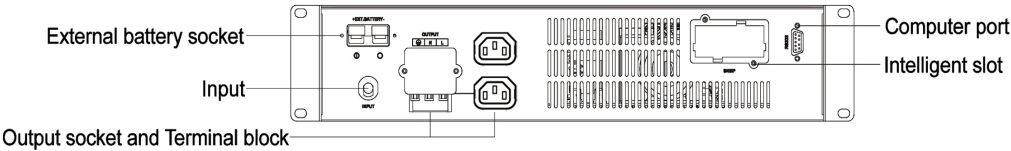

PT-RT1-3K/1-3KL Rack Mount Rear Panel

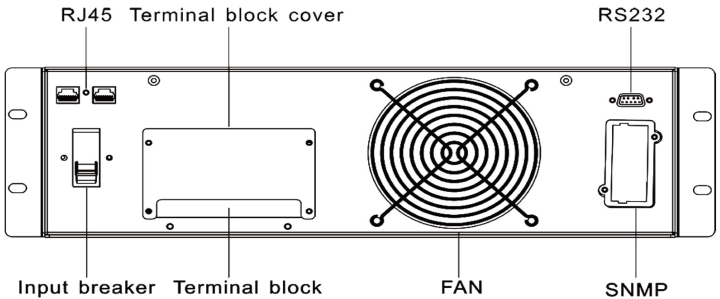

BACK VIEW OF 6KL

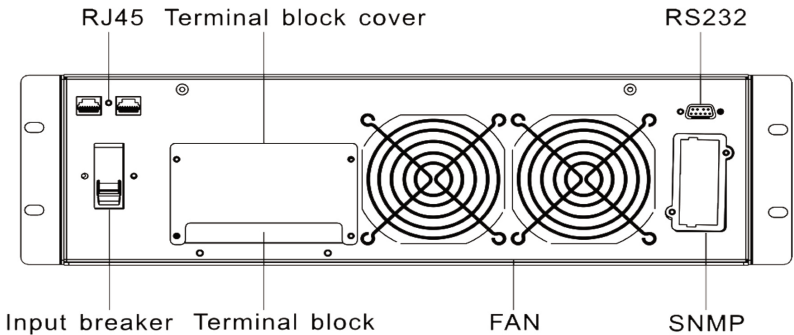

BACK VIEW OF 10KL

Model		PT-RT1K	PT-RT1KL	PT-RT2K	PT-RT2KL	PT-RT3K	PT-RT3KL	PT-RT6KL	PT-RT10KL	31PT-RT10KL
Rated capacity		1KVA/0.9KW		2KVA/1.8KW		3KVA/2.7KW		6KVA/5.4KW	10KVA/9KW	10KVA/9KW
Input	Input form	Single phase + N								Three-phase + N + PE
	Voltage range	(90±5)VAC~(300±5)VAC						(120-274) VAC		
	Power factor	≥0.99								>0.95(Full load)
Output	Output form	Single phase + N								
	Rated voltage	220VAC								
	Power factor	0.9								
	Voltage accuracy	≤±2%						±1%		
Battery	Input voltage	24Vdc/36Vdc		48Vdc/72Vdc		72Vdc/96Vdc		192Vdc		
	Build-in battery quantity/pcs	2	/	4	/	6	/	/		
	Charge current	1A	5.5A	1A	5.5A	1A	5.5A	27A	45A	45A
LxWxH (mm)		482.6x88x400		482.6x88x400	482.6x88x400	482.6×88×550	482.6x88x400	665x482.6x132.5		
N.W (Kgs)		10.5	6.5	15.7	8.1	22.1	8.5	20	21.5	22.5