


Line Interactive UPS

PT-F650/F1000/F1500/F2000/F3000




Key Features:

- Auto Re-starts When AC Recovers
- Silence Setup
- Automatic Charging (Offline Charging)
- Battery Low Voltage Protection
- Overload & Short Circuit Protection
- CPU Controlled
- Optional RJ45 / RJ11 & USB Port
- Wide Input Voltage Range
- LED Display
- Built-in 7AH & 9AH battery

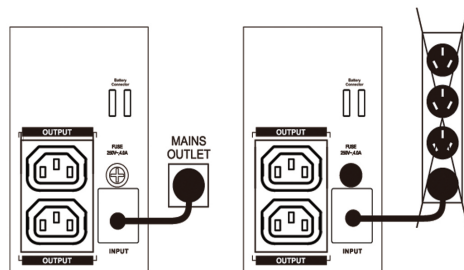

Connect the Power Cord, to a verified grounded 3-wire receptacle. Do not power the UPS using a surge suppressor or power strip.

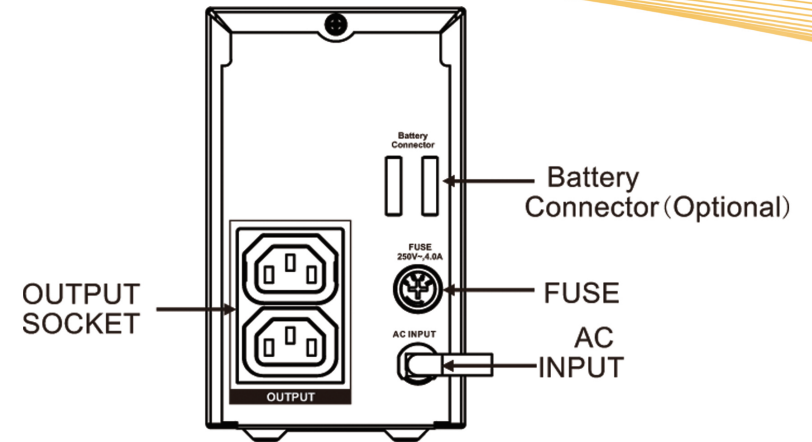

Model No	PT-F650	PT-F1000	PT-F1500	PT-F2000	PT-F3000
Capacity	650VA /390W	1000VA /600W	1500VA /900W	2000VA /1200W	3000VA /1800W
INPUT					
Voltage range	145-290Vac±5Vac			175-275Vac±5Vac	
Frequency	60Hz(automatic detection)				
AC Fuse	Inbuilt				
OUTPUT					
Voltage range	195-255Vac±5Vac			198-242Vac±5Vac	
Frequency(DC mode)	60Hz+/-0.5Hz				
Output wave form	PWM				
Output socket	IEC Socket				
Battery					
Battery type	Rechargeable sealed lead acid,maintenance				
Battery capacity	12V/7Ah×1	12V/9Ah×1	12V/9Ah×2	12V/9Ah×2	12V/9Ah×4
Backup time(with1set of PC)	5-15 Minutes				
Typical charging period	4-6 hours recover to 90% capacity				
Charging technology	Microprocessor controlled				
Transfer time					
Typical	Typical 2-6ms,10ms max				
State indication					
AC mode	Green LED is bright				
DC mode	Red LED is bright				
Protection					
All protections	Discharge,Overcharge and Overload				
Weight					
Net weight	4.6kg	4.9kg	10kg	10.9kg	19.6kg